



The Specialist In Drum Handling Equipment

Over 100 Drum Handling Models

As distributed by:  
 Benko Products, Inc.  
 www.benkoproducts.com  
 ph: 440-934-2180  
 fax: 440-934-4052

# Inside

	Page
<b>Clamp+Go™ Dolly Handle</b>	2
Drum Dollies	2
<b>MORcinch™ Drum Handling System</b>	3
Drum Rollers	4
Drum Tumblers	5
Forklift-Karriers	6
<b>MORSpeed™ Forklift Attachments</b>	7
Forklift Mounted Drum Rackers	7
Drum Rackers	8
Mobile-Karriers	9
Drum Palletizers	9
Below-Hook Kontrol-Karriers	10
Below-Hook Drum Lifters	11
Hydra-Lift Karriers	12
Vertical-Lift Drum Pourers	13
Diameter Adaptors & Drum Cones	13
Drum Trucks & Cradles	14
Drum Heaters and Pail Heaters	14
<b>PailPRO™ 5-Gallon Pail Handlers</b>	15
Drum Wrenches	16
Drum Faucets	16
Drum Hand Pumps	16



Drum Rotators



Forklift Drum Handlers



Below-Hook Drum Handlers



Mobile Drum Handlers



## Dolly Handle (patent pending)

Reduce risks to workers with the ergonomic and safety-conscious Morse Clamp+Go™ Dolly Handle. It attaches to the sidewall of various drum dollies to move your drums around.



## You get MORE with MORSE



Since 1923 Morse Manufacturing has been dedicated to giving you more - and in today's world of increased domestic and international competition you should expect more. What can you expect from Morse Manufacturing?

- **Customer Service:** Expect personal attention from one of our customer service representatives. Visit the Company Directory on our web site, give us a call and let us get to know you personally.
- **Dealer Support:** We value your time and your knowledge! You can expect assistance with any drum-handling question when you contact us.
- **Product Support:** If you have a technical question, expect to speak with one of the design engineers themselves. We strive to make sure you get the product that meets your needs.
- **Product Selection:** Morse offers the most extensive line of drum-handling equipment. If you don't see what you need in our standard offering, our custom capabilities will help to meet your needs.
- **Product Quality:** Every Morse Product design was professionally engineered inhouse to exceed industry standards. You see foreign products that look like a Morse? Know with confidence who designed the original! We are so confident in our products, our skilled employees, our certified welders, and our production process that we offer a 2-Year Guarantee against all defects.
- **Product Information:** Current and informative product literature and parts diagrams. Visit the literature pages on our web site. We labor tirelessly to keep our literature up to date and you informed of any product introductions or changes.
- **History:** With a history of over 85 years, you can expect us to provide you with replacement parts or product upgrades when you need them in the future - 5, 10, or 20 years from now. Morse is committed to manufacturing our products in the USA.

Thanks for considering Morse for your drum handling needs. Please feel free to contact us.

Robert R. Andrews

President

Phone: (315) 437-8475

Email: [info@MorseDrum.com](mailto:info@MorseDrum.com)



### New Clamp+Go™ Dolly Handle Model 24 (Patent Pending)

Increase worker safety by moving drum dollies with the **Clamp+Go™**. Drum is far more stable because you apply force below the drum's center of gravity. Attach **Clamp+Go™** to the sidewall of your drum dolly with a downward push to engage the quick-coupling mechanism. Easily move your drum, even into and out of confined areas.

Applying lateral force at the top of a drum shifts over 70% of the weight to the front dolly wheels, making the dolly difficult to control, and potentially hazardous - even topple over if the dolly wheels hit an obstruction, a hole in the floor, or while descending a slope.



Increase control and decrease risks by attaching the **Clamp+Go™** to your drum dolly. You then pull from the bottom of the drum, with weight far more evenly distributed on all dolly wheels. You have greater control, and significantly reduce risk of tipping.

Use the **Clamp+Go™** with various sizes of round drum dollies. Easily disengage from one dolly, and quickly connect to another. Always comply with the maximum capacity of the drum dolly being handled.

For convenient storage, push the **Clamp+Go™** handle to hold in upright position.



### Round Drum Dollies - Capacity: 1000 Lb.


Easily move a drum on four 3" MORTUF polyolefin swivel casters and wide stance base. Handle drum up to 23" O.D.



Model 14-SS

### Square Drum Dollies - Capacity: 1000 Lb.

Move your drum on this dolly with flat deck and rounded corners turned up to hold the drum in position. Four 3" MORTUF polyolefin swivel casters on wide stance base. Handle drum up to 24" O.D.



Model 34

**Option # 4959i-P:** Stainless steel casters with polypropylene wheels on any Morse drum dolly.

Model #	Description	Ship Wt.
14	Round Dolly for 55-gallon drum, steel casters with MORTUF polyolefin wheels	22 Lb.
14M	Round Dolly with spark resistant parts, for 55-gallon drum, steel casters with MORTUF polyolefin wheels	22 Lb.
14-SS	Round Dolly, type 304 stainless steel, for 55-gallon drum, steel casters with MORTUF polyolefin wheels	22 Lb.
14-SSC	Round Dolly, type 304 stainless steel, for 55-gallon drum, stainless steel casters with polypropylene wheels	22 Lb.
14-30	Round Dolly for 30-gallon drum, steel casters with MORTUF polyolefin wheels	19 Lb.
14-30SS	Round Dolly, type 304 stainless steel, for 30-gallon drum, steel casters with MORTUF polyolefin wheels	20 Lb.
34	Square Dolly for 55-gallon drum, steel casters with MORTUF polyolefin wheels	21 Lb.
34-SS	Square Dolly, type 304 stainless steel, for 55-gallon drum, steel casters with MORTUF polyolefin wheels	21 Lb.
34-30	Square Dolly for 30-gallon drum, steel casters with MORTUF polyolefin wheels	17 Lb.
34-30SS	Square Dolly, type 304 stainless steel, for 55-gallon drum, steel casters with MORTUF polyolefin wheels	17 Lb.
34-5	Square Dolly for 5-gallon pail, steel casters with MORTUF polyolefin wheels	10 Lb.
34-5SS	Square Dolly, type 304 stainless steel, for 5-gallon pail, steel casters with MORTUF polyolefin wheels	10 Lb.

# MORCINCH™ Drum Handling System



MORcinch™ Drum Holder





MORcinch™ Drum Holder with Web Sling (Option 5115i-P) installed

- Automatically adjusts to accommodate 22" to 23.5" diameter drum. . . .and any size in between
- Has a flexible cinch chain cover (shown left) to enhance grip and help protect sidewall of your drum
- Has durable stress relief weld joints
- Accepts Top Rim Clamp and Bracket Assembly options for plastic or fiber drum
- Accepts Diameter Adaptors for various smaller drums (page 13)

The MORcinch™ Drum Handling System is a feature of Morse Kontrol-Karriers, Forklift-Karriers, Hydra-Lift Karriers and Vertical-Lift Drum Pourers.

## Automatically Adjusts!



## MORcinch™ Options to Handle Various Drums

### MORcinch™ Options

#### Top Rim Clamp for 55-gallon plastic drum with top rim



Part # 4560-P shown bolted onto MORcinch™ drum holder



The **Top Rim Clamp** grips the upper rim of your drum to prevent it from slipping through the drum holder.

- Part # 4560-P Top Rim Clamp Assembly
- Part # 4560M-P Spark Resistant Top Rim Clamp Assembly
- Part # 4560SS-P Stainless Steel Top Rim Clamp Assembly



### Hydra-Lift Karriers



### Vertical-Lift Drum Pourers



## Bracket Assembly for a rimless plastic drum or to more safely handle a fiber drum



Part # 4556-P shown bolted onto MORcinch™ drum holder



Install the **Bracket Assembly** as a brace at top and bottom of your drum to prevent it from slipping lengthways through the drum holder. Handle a drum from 31" to 39" tall.

- Part # 4556-P Bracket Assembly.
- Part # 4556M-P Spark Resistant Bracket Assembly.
- Part # 4556SS-P Stainless Steel Bracket Assembly.



## Diameter Adaptors to handle various smaller drums with the same drum handler



Model 55/30-16 Diameter Adaptor for 15.5" to 16" (39.4 to 40.6 cm) diameter drum



Simply insert the correct size Diameter Adaptor into the drum holder. Diameter Adaptors for 17.5" diameter and smaller drums have integrated brackets at top and bottom of the drum that adjust to securely hold a drum up to 38" tall.

Also available made of spark resistant monel or stainless steel. See full list of Diameters on page 13.



# DRUM ROLLERS

## Hydra-Lift Drum Rollers

- Load your upright drum at floor level
- Power-lift drum to rolling position
- Roll closed drum on its side to mix the contents



Enjoy the benefits of easy, ergonomic loading and unloading and eliminate the hazards of manual drum handling. Hydra-Lift Drum Rollers accept your drum in upright position at floor level. Then you control the built-in hydraulic system to lift your drum and place it quickly and easily for rotation. Start and stop rotation with a second control.

Roll your drum at 5 to 20 RPM until contents are mixed as desired, then return the drum to vertical to unload. Rotate a steel drum: 6" to 26" diameter, maximum 40" length. AC Motor is 1 HP 60 Hz. Models with 50Hz motors are also available, however, expect a 20% reduction in drum RPM.

Capacity: 1,000 Lb. liquid load, 400 Lb. dry load.

**Option # POLY-456** to roll plastic drum. Extra wheels support flexible sidewall, and end stop prevents plastic drum from travelling lengthways.



Guard Enclosure Kit GEK-456-1-115 (Drum Roller sold separately)

Model #	Description	Ship Wt.
456-1-115	Hydra-Lift Drum Roller, 1-phase 115V TEFC motor and controls	625 Lb.
GEK-456-1-115	Guard Enclosure Kit with Safety Interlock for Model 456-1-115	375 Lb.
456-A	Hydra-Lift Drum Roller, Air Motor	622 Lb.
GEK-456-A	Guard Enclosure Kit with Safety Interlock for Model 456-A	375 Lb.
POLY-456	Option to roll a plastic drum on Hydra-Lift Drum Roller	30 Lb.

## Stationary Drum Rollers

- Mix right inside your sealed drums
- Bring valuable ingredients back into solution
- Place drum onto roller with model 41 or 42 drum lifter

Roll 6" to 28" diameter drum on its side. Set your drum onto the rotator wheels and roll it to mix the contents. Choose factory set drum speed of 10, 20 or 30 RPM - or choose Variable Speed models to rotate drum from 0 to 40 RPM.



### Double Drum Rollers

Roll one or two drums up to 36" Base: 24" x 94" long.



### Single Drum Rollers

Roll one drum up to 40" long. Base: 24" x 55"

Model #	Description	Ship Wt.
1-5154/10-1	Single Stationary Drum Roller, 10 RPM, 1-phase 115/230V TEFC motor	296 Lb.
2-5154/20-E1	Double Stationary Drum Roller, 20 RPM, explosion-proof 1-phase 115/230V TEFC motor	450 Lb.
1-5154/30-A	Stationary Drum Roller, 30 RPM, air motor	292 Lb.
1-5154VS-1-115	Single Stationary Roller, Variable Speed 0-40 RPM, 1-phase 115V motor	306 Lb.
POLY-1-5154	Option: Roll a plastic drum on Stationary Drum Roller	30 Lb.
POLY-2-5154	Option: Roll plastic drums on Double Stationary Drum Roller	50 Lb.
1-5-1	Idler Attachment to roll 1 to 5 gallon can on Drum Roller	12 Lb.

Capacity: Liquid load: 1,000 Lb. per drum. Dry load varies: 400 Lb. at 10 RPM, 300 Lb. at 20 RPM, and 250 Lb. at 30 RPM. Also available: 50Hz models with 20% reduction in drum RPM.

**Option # POLY-1-5154** Roll plastic drum on single drum roller.

**Option # POLY-2-5154** Roll plastic drums on double drum rollers.

**Part # 1-5-1** Idler Attachment to roll a 1 to 5 gallon pail. Easily removed for rolling a drum.

## Portable Drum Rollers

Roll your closed drum on its side to agitate the contents with this compact, portable industrial drum mixer. Bring important ingredients back into suspension. Eliminate worker exposure and reduce clean-up. Also use your Portable Drum Roller as a drain stand to dispense from a drum. Roll a 6" to 28" diameter steel drum up to 40" long. AC Motor is 1/2 HP, 60 Hz. Capacity: Liquid load: 500 Lb. per drum. Dry load varies: 400 Lb. at 10 RPM, 300 Lb. at 20 RPM, and 250 Lb. at 30 RPM. 50Hz models have 20% reduction in drum RPM.


**Optional Guard Enclosure Kits with Safety Interlock** to meet OSHA requirements.

**Option # POLY-201** Roll plastic drum on Portable Drum Roller.

**Option # 1-5P** Idler Attachment to roll 1 to 5 gallon pail. Remove to roll drum.



Model 201VS-1

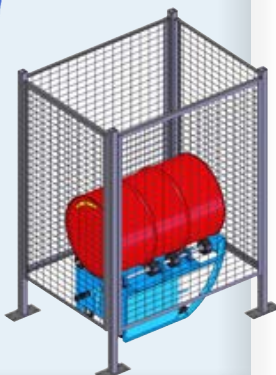

Guard Enclosure with safety interlock model GEK-201-1. Portable Drum Roller (sold separately)

Model #	Description	Ship Wt.
201/20-1	Portable Drum Roller, 20 RPM, 1-phase 115V TEFC motor	168 Lb.
201VS-1	Portable Drum Roller, Variable Speed 10-24 RPM, 1-phase 115V TEFC motor	175 Lb.
GEK-201-1	Guard Enclosure Kit for 1-phase AC Portable Drum Rollers	340 Lb.
201/30-A	Portable Drum Roller, 30 RPM, air motor	151 Lb.
POLY-201	Option: Roll a plastic drum on Portable Drum Roller	62 Lb.
1-5P	Idler Attachment to roll 1 to 5 gallon can on Portable Drum Roller	7 Lb.

**IMPORTANT:** Install all Morse Drum Rollers and Drum Tumblers in accordance with OSHA requirements for enclosure and safety interlock, etc. One way to accomplish this, is a Morse Guard Enclosure with safety interlock to automatically shut off the drum rotator when the gate is opened.

**Tilt-To-Load Drum Tumblers**

- Load your upright drum at floor level
- Ergonomic power-lift drum to rotate position
- Vigorous “corner-over-corner” mixing
- Rotate steel, plastic or fiber drum of various sizes (29” to 37” tall, 18” to 23.5” diameter)



Load with drum truck, hoist or crane

Secure drum in holder

Power tilt control

Tumble drum to mix contents

Morse Tilt-To-Load Drum Rotators thoroughly mix the contents of your closed drum with vigorous “corner-over-corner” tumbling. Load drum at floor level. Secure drum in holder, then use one handle to lift drum and a second handle to control drum rotation.

Drum rotation is variable from 5 to 20 RPM. Models available with explosion-proof motor or air motor for hazardous areas. 50Hz models have 20% reduction in drum RPM.

Capacity: 800 Lb. for a full drum, 400 Lb. for a half-full drum. Half-full capacity is for a bottom-heavy, unbalanced or shifting load, harder to tilt than a full drum.

Model #	Description	Ship Wt.
310-3-230	Tilt-To-Load Drum Rotator, 3-phase 230V motor and controls	1240 Lb.
GEK-310-3-230	Guard Enclosure Kit with Safety Interlock for Model 310-3-230 (Drum Tumbler sold separately)	400 Lb.

**End-Over-End Drum Tumblers**

- Tumble drums end-over-end for thorough mixing, putting valuable ingredients back into suspension

The Morse End-Over-End Drum Rotators tumble a 55-gallon steel drum, providing a vigorous mix, ideal for very viscous substances, wet grains, dry powders or coarse granules. Drum rotation speed is 13 RPM. Variable speed models adjust from 3 to 20 RPM. Capacity: 800 Lb. per full drum, 400 Lb. per half-full drum.



**Single Drum Tumblers**

rotate one 55-gallon steel drum. Base: 30” x 54”

**Double Drum Tumblers**

rotate one or two 55-gallon steel drums. Base: 30” x 88”

Model #	Description	Ship Wt.
1-300VS-1-115	Single End-Over-End Drum Tumbler, variable speed 3 to 20 RPM, 1-phase 115V motor and controls	621 Lb.
1-300-1-115	Single End-Over-End Drum Tumbler, 13 RPM, 1-phase 115V motor and controls	621 Lb.
GEK-1-300-1-115	Guard Enclosure Kit with Safety Interlock for Model 1-300-1-115	375 Lb.
300LC	Option: Load Crane, factory installed, welded to right side	82 Lb.
300LCL	Option: 2nd Load Crane, factory installed, welded to left side of double drum tumbler	82 Lb.
5026-P	Option: Clamp Screw Kit to hold 55-gallon plastic drum	

Models for 50Hz available with 20% reduction in drum RPM.

**Save Time, Labor and Money!**

- Save labor of transferring contents and clean-up
- Improve safety by eliminating spills, contamination, and exposure to contents
- Remix settled ingredients with no container to purge between batches, and without inserting anything into your drum

**Tilt-To-Load Drum Tumblers with Automated Control Package and Safety Enclosure**

The Automated Control Package automatically lifts your drum, rotates it for the time you set, then returns it to upright position at floor-level for easy handling. Model#311-3-230 includes Tilt-To-Load Drum Tumbler, Automated Control Package, and Enclosure with Safety Interlock.



Model #	Description	Ship Wt.
311-3-230	Tilt-To-Load Drum Tumbler with Automated Control Package, and Enclosure with Safety Interlock (ships in 2 parts)	
	Drum Tumbler with Automated Controls	1136 Lb.
	Guard Enclosure Kit with Safety Interlock	400 Lb.



Place drum in holder with Drum Lifting Hook


Use your crane and the Drum Lifting Hook model 41 or 41M included with each End-Over-End Drum Rotator to lift your drum and place it into the drum holder.

Models with explosion-proof motor or air motor available for hazardous areas.

**Option # 5026-P:** Clamp Screw Kit to tumble 55-gallon plastic drum.



Optional Clamp Screw Assembly Kit for 55-gallon plastic drum



Optional Load Crane

**Option # 300LC or 300LCL:** Load crane provides self-contained loading capability. Use one load crane for single drum tumbler. Use two for double drum tumbler.

Power connections and motor controls must comply with applicable codes.



Guard Enclosure Kit GEK-2-300-1-115 (Drum Tumbler sold separately)

# FORKLIFT-KARRIERS



## Model 285A Forklift-Karrier

Has 800 Lb. capacity. You control drum tilt with 30:1 ratio gear and sprocket drive. MORcinch™ Drum Handling System (page 3) with options for handling plastic drum, fiber drum or various smaller drums.

## Model 285A-HD Heavy-Duty Forklift-Karrier

Handle drum up to 1500 Lb. Provides finer tilt control with 60:1 ratio gear and sprocket drive. Features MORcinch™ Drum Handling System (page 3).



## Model 285A-GR Extra Heavy-Duty Forklift-Karrier

Provides 2000 Lb. capacity with an enclosed worm gear speed reducer for drum tilt control with 150:1 ratio. It has two load binders to secure the drum in the holder.



## Model 285XGR Super-Duty Forklift-Karrier

Handle extremely heavy drum up to 2500 Lb. Designed with a heavily reinforced 3-piece drum holder, and an enclosed worm gear speed reducer with 150:1 ratio for drum tilt control.



- Lift, move, and pour a drum with your forklift
- Rotate drum 360° in either direction
- Models with MORcinch™ Drum Handling System (page 3) accept options for handling:
  - Plastic drum
  - Fiber drum
  - Various sizes of smaller drum

Turn your forklift into a safety conscious drum handler with a Morse Forklift-Karrier. Lift, move and control pouring of a heavy drum right from the seat of your forklift. Forklift-Karriers mount quickly and easily onto the forks, requiring no power connections or modifications to your truck.

You may attach a Drum Cone, faucet or valve to control dispensing.

Models with spark resistant parts are available. Stainless steel models are made on a custom basis.

We recommend the MORStop Tilt-Brake Option factory installed on each 800 Lb. and 1500 Lb. capacity Forklift-Karrier with manual tilt. It automatically holds the drum tilt angle, even when contents shift.

Model #	Capacity	Description	Ship Wt.
<b>Forklift-Karriers with MORcinch™ Drum Handling System</b>			
285A	800 Lb.	Standard duty Forklift-Karrier	149 Lb.
285AM	800 Lb.	Standard duty Forklift-Karrier with spark resistant parts	149 Lb.
285A-HD	1500 Lb.	Heavy-duty Forklift-Karrier	171 Lb.
285AM-HD	1500 Lb.	Heavy-duty Forklift-Karrier with spark resistant parts	171 Lb.
<b>Forklift-Karrier with Two Load Binders for 55-Gallon Steel Drum</b>			
285A-GR	2000 Lb.	Extra Heavy-Duty Forklift-Karrier	273 Lb.
<b>Forklift-Karriers with 3-Piece Drum Holder for 55-Gallon Steel Drum</b>			
285G	800 Lb.	Standard duty Forklift-Karrier with 3-piece drum holder	162 Lb.
285G-HD	1500 Lb.	Heavy-duty Forklift-Karrier with 3-piece drum holder	176 Lb.
285XGR	2500 Lb.	Super-Duty Forklift-Karrier	350 Lb.
285XMGR	2500 Lb.	Super-Duty Forklift-Karrier with spark resistant parts	350 Lb.

### Manual Tilt Control Options



Install MORStop Tilt-Brake option to automatically prevent unwanted drum tilting.

Option #	Description
X01	Hand Crank and MORStop Tilt-Brake
X02	Hand Crank
X03	16" Diameter Hand Wheel
3900i-P	MORStop Tilt-Brake Factory installed on new unit
3900-P	MORStop Tilt-Brake for field installation on existing unit

## Forklift-Karrier with Battery Power Tilt

### Model 285A-BP

Use a two-button pendant or optional wireless tilt control (shown) to pour a drum with your fork truck. Fully invert your drum in 15 seconds. On board battery and charger are included. No power connection or modification of your truck is required.

Handle: 55-gallon steel drum. Accepts MORcinch™ options to handle plastic or fiber drum (page 3), and Diameter Adaptors for smaller drums (page 13).



Model #	Capacity	Description	Ship Wt.
285A-BP	1500 Lb.	Battery powered tilt. 1500 Lb. capacity. Accepts Top Rim Clamp or Bracket Assembly.	355 Lb.
285XBP	2500 Lb.	Battery powered tilt. 2500 Lb. capacity.	500 Lb.
4804i-P	--	Wireless Control Option factory installed	3 Lb.


**MORSpeed™ Models**



**Model 288-1** is designed to handle one rimmed drum.



**Model 288-2** is designed to handle one or two rimmed drums at a time.



**Model 288-1-2H** has two heads to handle one rimmed drum.



**Model 288-2-2H** handle one or two rimmed drums at a time with two heads per drum.


**MORSpeed™ Forklift Attachments**

**Fast handling of rimmed drums with your forklift**


Lift, move and place drums right from your forklift. Mount on forks in seconds without any tools. No power connections. Raise forks to grip drums. Massive steel jaws grip upper rim of drum.

Capacity: 1500 Lb. per drum.

Use *MORSpeed™* forklift attachments to handle rimmed steel, fiber or plastic drums. Quickly and easily move drums without leaving your forklift. Load drums onto trucks or pallets. Even handle damaged or straight walled drums. They handle any diameter, but require a minimum drum height of 24". The minimum weight required to actuate the jaws is 75 Lb. per drum (350 Lb. for models with two heads per drum).

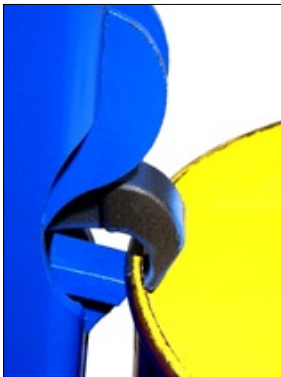


Wide *MORSpeed™* jaws are contoured to securely grasp virtually any rimmed drum. The encased mechanism provides precise, reliable, automatic drum gripping. Two heads per drum versions reduce stress on the drum by distributing the weight between two sets of jaws. This is a feature of Models 288-1-2H, 288-2-2H and 287-2H.



Option: Belt Kit part # 2523-P puts a fabric surface in front of the steel backrest of the *MORSpeed™* to protect the finish on your drum. It is easy to install using 4 bolts provided. *MORSpeed™* models use one belt kit per drum.

**MORStak™ Forklift Mounted Drum Rackers**

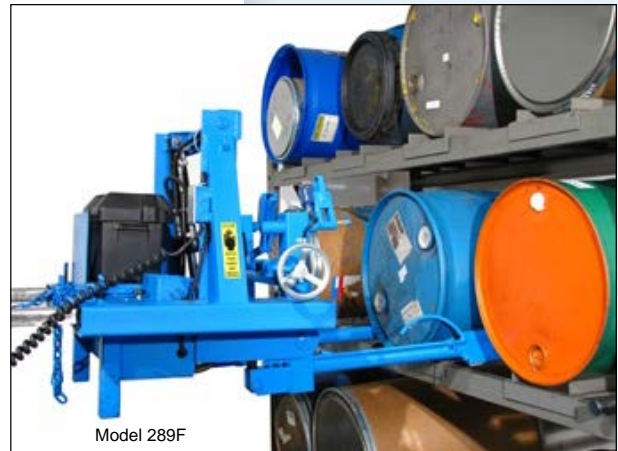

Model 289F

Use the safety conscious *MORStak™* Forklift Mounted Drum Rackers, to move drums on and off racks, pallets and trucks with your forklift. Lift an upright drum and place it in horizontal position. Rack rimmed 55-gallon steel or plastic drums weighing up to 800 Lb. side by side with virtually zero clearance between them. Handle a drum with faucet in place, allowing drum rack to serve as a dispensing station.

Control drum tilting with the 2-button pendant that reaches back to the forklift operator, or optional wireless tilt control (shown right). On board 12V deep cycle battery and charger are included for powered tilt with self-contained hydraulics. The positive drum gripping mechanism must be manually engaged to lift an upright drum or tilt a drum from horizontal. *MORStak™* drum rackers will not allow you to tilt your drum without the clamp engaged.



Model #	Description	Ship Wt.
288-1	1 Drum Handler, 1 head for the drum	257 Lb.
288M-1	1 Drum Handler, spark resistant parts, 1 head	272 Lb.
288-1-2H	1 Drum Handler, 2 heads for the drum	301 Lb.
288-2	2 Drum Handler, 1 head per drum	376 Lb.
288M-2	2 Drum Handler, spark resistant parts, 1 head/drum	394 Lb.
288-2-2H	2 Drum Handler, 2 heads per drum	488 Lb.
287	Carriage Mount Drum Handler, 1 head for the drum	138 Lb.
287M	Carriage Mount Drum Handler, spark resistant parts, 1 head for the drum	138 Lb.
287-2H	Carriage Mount Drum Handler, 2 heads per drum	186 Lb.
2523-P	Option: Belted Backrest Kit (order 1 per drum)	5 Lb.

Model #	Description	Ship Wt.
289F	Fork mounted drum racker	622 Lb.
289C	Carriage mounted drum racker	600 Lb.
4804i-P	Wireless Control Option factory installed	3 Lb.

# DRUM RACKERS

## MORStak™ Drum Rackers

Quickly move and rack your heavy drums up to 102" high  
 Rack drums with virtually no space between them  
 Capacity: 800 Lb.

MORStak™ drum rackers move in tight spaces where your forklift won't fit... the turning radius is only 6 feet. Rack your drums with virtually no space between them. Lift a drum from either upright or horizontal position and place it into a drum rack. Handle steel or plastic rimmed 55-gallon drum. Choose electric, battery or air powered lift and tilt function. Air powered models require plant air at 40 to 60 psi flowing at a rate of 40 scfm.



1. Manually secure clamp to grip drum (top), then raise upright drum.




2. Tilt drum to horizontal and transport to racking location.




3. Manually release clamp, then raise drum to place in rack.

**Two-Stage Series** rack drum up to 102" high.  
 Base dimensions: L56 X W41"

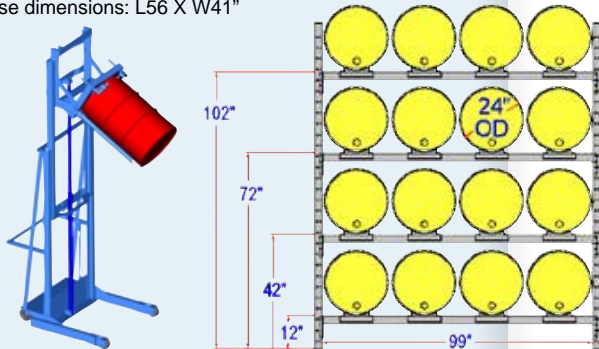

Model #	Description	Ship Weight
620-115	MORStak™ Drum Racker, 102", Battery Power Lift & Tilt	950 Lb.
620-114	MORStak™ Drum Racker, 102", Air Power Lift & Tilt	985 Lb.
620M-114	MORStak™ Drum Racker, 102", Spark Resistant Parts, Air Power Lift & Tilt	985 Lb.
620-110	MORStak™ Drum Racker, 102", AC Power Lift & Tilt	900 Lb.
611-115	MORStak™ Drum Racker, 56", Battery Power Lift & Tilt	785 Lb.
611-114	MORStak™ Drum Racker, 56", Air Power Lift & Tilt	820 Lb.
611M-114	MORStak™ Drum Racker, 56", Spark Resistant Parts, Air Power Lift & Tilt	820 Lb.
611-110	MORStak™ Drum Racker, 56", AC Power Lift & Tilt	735 Lb.

**Single-Stage Series** rack drum up to 56" high.  
 Base dimensions: L49" x W36"

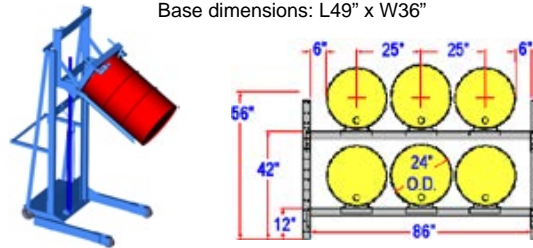

## Omni-Lift™ Drum Rackers

Rack your drum up to 72" high.  
 Capacity: 800 Lb.

You can easily lift, tilt and rack a heavy drum up to 6 feet high with an Omni-Lift™ Drum Racker. Power options provide quicker and more ergonomic drum racking. Choose battery, AC or air powered lift and tilt function. Omni-Lift™ Drum Rackers handle a 55-gallon steel drum, or add Option AP405 to handle a 55-gallon plastic drum. Models with spark resistant parts are also available.

With Omni-Lift™ Drum Rackers you can lift a drum from vertical or horizontal position on the floor. You can also place a drum down in either position. You can also use your Omni-Lift™ Drum racker to pour a drum.

Options:

Adaptor for 55-gallon rimmed plastic drum (part # AP405)

Filter, Regulator, Lubricator for air powered models (part # 3869-P)



Load your drum onto Stationary Drum Rollers.



Model #	Description	Ship Weight
405	Omni-Lift™ Drum Racker, Manual Lift and Tilt	428 Lb.
405-115	Omni-Lift™ Drum Racker, Battery Power Lift and Tilt	522 Lb.
405-125	Omni-Lift™ Drum Racker, Battery Power Lift, Manual Tilt	530 Lb.
405-114	Omni-Lift™ Drum Racker, Air Power Lift and Tilt	463 Lb.
405M-114	Omni-Lift™ Drum Racker, Spark Resistant Parts, Air Power Lift and Tilt	488 Lb.
405-124	Omni-Lift™ Drum Racker, Air Power Lift, Manual Tilt	451 Lb.
405M-124	Omni-Lift™ Drum Racker, Spark Resistant Parts, Air Power Lift, Manual Tilt	451 Lb.
405-110	Omni-Lift™ Drum Racker, AC Power Lift and Tilt	493 Lb.
405-120	Omni-Lift™ Drum Racker, AC Power Lift, Manual Tilt	450 Lb.



## Mobile-Karriers

Raise, transport and drain a heavy drum  
**Capacity: 800 Lb.**

Mobile-Karriers carry the drum without the need to balance or support it. Lock the drum in vertical position for transporting, or in horizontal position to pour. You can rotate a drum by hand 360° in either direction. Use it to pour a drum at up to 17" high. Handle 55-gallon steel drum.

Options:

Diameter Adaptors for smaller diameter drum.



Model 80A



Model 80i-SS

Model #	Description	Ship Weight
80A	55-Gallon Steel Drum	95 Lb.
80i	55-Gallon Steel Drum, Accepts Diameter Adaptors	97 Lb.
80AM	55-Gallon Steel Drum, Spark Resistant Parts	97 Lb.
80i-SS	55-Gallon Steel Drum, made of Type 304 Stainless Steel, Accepts Diameter Adaptors	108 Lb.
80APS	55-Gallon Plastic or Steel Drum, includes Anti-Slip Strips	97 Lb.
80C	Fiber or Steel 21" to 23" Diameter Drum	97 Lb.

## Drum Palletizers that Pour

Lift upright drum up to 20" high  
 Move and dispense up to 26" high  
 Move drum on and off pallets  
**Capacity: 800 Lb.**

Designed to lift and pour a heavy drum at up to 26" high, when held in horizontal position. Manually rotate a drum 360° in either direction. Raise upright drum up to 20" above the floor. Lock drum in vertical position to prevent spills while transporting, or lock in horizontal position to dispense. Also move a drum to and from pallets. Handle 55-gallon steel drum. Options for handling other drums:

Top Rim Clamp for 55-gallon rimmed plastic drum (below).

Bracket Assembly for fiber drum or rimless plastic drum.

Diameter Adaptors for smaller diameter drum.



Model 82A



Model #	Description	Ship Weight
82A	Drum Palletizer / Pourer, Manual Lift	504 Lb.
82A-120	Drum Palletizer / Pourer, AC Power Lift	525 Lb.
82A-124	Drum Palletizer / Pourer, Air Power Lift	495 Lb.
82A-125	Drum Palletizer / Pourer, Battery Power Lift	551 Lb.
82AM	Drum Palletizer / Pourer, Manual Lift, Spark Resistant Parts	504 Lb.
82AM-124	Drum Palletizer / Pourer, Air Power Lift, Spark Resistant Parts	495 Lb.

Distributed by: Benko Products, Inc.

## Model 81 Drum Spotter

Easily move drum on and off pallets

**Capacity: 800 Lb.**

The compact, easy-to-use Drum Spotter makes it simple and quick to move a drum on and off pallets. Raise the handle to engage the upper drum rim and lower the handle to lift your rimmed drum from a pallet up to 6" high. You do not need to balance or support the Drum Spotter. The handle is held up by a gas spring and ratchet stops provide several positions where the handle will stay until you take hold.

Handle rimmed steel, plastic or fiber drum 22" to 23.5" diameter, 34" to 36" tall.



## Drum Movers / Palletizers

Lift drum up to 19" high  
 Move drum to and from pallet  
**Capacity: 1000 Lb.**

You can quickly and easily move a heavy drum to and from pallets. Simply move the drum palletizer to your drum and raise the head to automatically engage the upper drum rim. It holds the drum in upright position for you to transport. Lower the drum to the floor or onto a pallet and the jaws automatically release when the drum is resting.

Raise a drum up to 19" above the floor. Handle rimmed steel, plastic or fiber drum with minimum height of 28.5". The minimum drum weight required to actuate the jaws is 75 Lb.



Spark Resistant Head of Model 82HM



Model 82H-125

Model #	Description	Ship Weight
81	Drum Spotter	245 Lb.
82H	Drum Lifter / Palletizer, Manual Lift	456 Lb.
82HM	Drum Lifter / Palletizer, Manual Lift, Spark Resistant Parts	456 Lb.
82H-120	Drum Lifter / Palletizer, AC Power Lift	470 Lb.
82H-124	Drum Lifter / Palletizer, Air Power Lift	440 Lb.
82HM-124	Drum Lifter / Palletizer, Air Power Lift, Spark Resistant Parts	440 Lb.
82H-125	Drum Lifter / Palletizer, Battery Power Lift	512 Lb.

# KONTROL-KARRIERS



## Model 185A Kontrol-Karrier

Has 800 Lb. capacity. You control drum tilt with 30:1 ratio gear and sprocket drive. MORcinch™ Drum Handling System (page 3) with options for handling plastic drum, fiber drum or various smaller drums.

Lift, move and control pouring of your heavy drum with a Morse Kontrol-Karrier attached to your hoist or crane.

We recommend MORStop Tilt-Brake option on each 800 Lb. and 1500 Lb. capacity Kontrol-Karrier, to add automatic hold of the drum tilt angle.

Models with spark resistant parts available. Stainless steel models also available.

## Model 185A-HD Heavy-Duty Kontrol-Karrier

Handle drum up to 1500 Lb. Provides finer tilt control with 60:1 ratio gear and sprocket drive. Features MORcinch™ Drum Handling System (page 3).



## Model 185A-GR Extra Heavy-Duty Kontrol-Karrier

Provides 2000 Lb. capacity with an enclosed worm gear speed reducer for drum tilt control with 60:1 ratio. It has two load binders to secure the drum in the holder.



## Model 185XGR Super-Duty Kontrol-Karrier

Handle extremely heavy drum up to 2500 Lb. Designed with a heavily reinforced 3-piece drum holder, and an enclosed worm gear speed reducer with 150:1 ratio for drum tilt control.



- Lift, move, and pour a drum with your hoist or crane
- Rotate drum 360° in either direction
- Models with MORcinch™ Drum Handling System (page 3) accept options for handling a plastic drum, fiber drum, and various sizes of smaller drum
- Every Morse Below-Hook Drum Handler is load tested at the factory as per American National Standard ASME B30.20 and a load test certificate is shipped enclosed with each unit.

Model #	Capacity	Description	Ship Wt.
<b>Kontrol-Karriers with MORcinch™ Drum Handling System</b>			
185A	800 Lb.	Standard duty Kontrol-Karrier	98 Lb.
185AM	800 Lb.	Standard duty Kontrol-Karrier with spark resistant parts	98 Lb.
185A-HD	1500 Lb.	Heavy-duty Kontrol-Karrier	109 Lb.
185AM-HD	1500 Lb.	Heavy-duty Kontrol-Karrier with spark resistant parts	109 Lb.
185A-HDSS	1500 Lb.	Stainless steel heavy-duty Kontrol-Karrier	114 Lb.
<b>Kontrol-Karrier with Two Load Binders for 55-Gallon Steel Drum</b>			
185A-GR	2000 Lb.	Extra Heavy-Duty Kontrol-Karrier	177 Lb.
<b>Kontrol-Karriers with 3-Piece Drum Holder for 55-Gallon Steel Drum</b>			
185G	800 Lb.	Standard duty Kontrol-Karrier with 3-piece drum holder	85 Lb.
185G-HD	1500 Lb.	Heavy-duty Kontrol-Karrier with 3-piece drum holder	118 Lb.
185XGR	2500 Lb.	Super-Duty Kontrol-Karrier	286 Lb.
185XMGR	2500 Lb.	Super-Duty Kontrol-Karrier with spark resistant parts	300 Lb.



Install MORStop Tilt-Brake option to automatically prevent unwanted drum tilting.

### Manual Tilt Control Options

Option #	Description
X01	Hand Crank and MORStop Tilt-Brake
X02	Hand Crank
X03	16" Diameter Hand Wheel
3900i-P	MORStop Tilt-Brake Factory installed on new unit
3900-P	MORStop Tilt-Brake for field installation on existing unit

## Power-Tilt Kontrol-Karriers

provide the ease of powered drum rotation 360° in either direction. Fully invert your drum in 15 seconds with an AC 2-button pendant (shown) or a hand-held control valve on air powered models. Handle 55-gallon steel drum up to 1500 Lb. Accepts Bracket Assembly for a plastic or fiber drum, and Diameter Adaptors (page 13) for smaller drums.

Model #	Description	Ship Wt.
195A-1-115	AC power-tilt, 1-phase/115V motor	467 Lb.
195A-3-230	AC power-tilt, 3-phase/230V motor	467 Lb.
195A-3-460	AC power-tilt, 3-phase/460V motor	467 Lb.
195A-A	Air motor power-tilt	453 Lb.
195AM-A	Air motor power-tilt, spark resistant parts	460 Lb.



Model 195A-1-115

**Drum Karriers** to lift, move and pour a drum within your reach below a hook on a hoist or crane. You manually control the tilt angle of the drum. Use the built-in tilt lock to hold the drum vertical for transporting, or in horizontal position to pour. Capacity: 800 Lb.

Custom versions for a nonstandard drum are available.

Model #	Description	Ship Wt.
85i	For 55-gallon steel drum, accepts adaptors	43 Lb.
85A	For 55-gallon steel drum	41 Lb.
85AM	Spark resistant parts, for 55-gallon steel drum	41 Lb.
85i-SS	Stainless steel for 55-gal. steel, accepts adaptors	41 Lb.
85C	For fiber or steel drum, 21" to 23" diameter	41 Lb.
85-5	For 5-gallon pail	31 Lb.



**Every Morse Below-Hook Drum Lifter is load tested at the factory as per American National Standard ASME B30.20 and a load test certificate is shipped enclosed with each unit.**

**Below-Hook Drum Lifters**

These drum lifters automatically grip below the rim of your closed steel, fiber or plastic drum.

Handle:

18" to 26" diameter (I.D.) rimmed drum

30 to 55-gallon drum

85-gallon steel salvage or overpack (NOT for lifting plastic overpacks)

Capacity: 1000 Lb.



Model #	Description	Ship Weight
92	Drum Lifter for rimmed 18" to 26" diameter	25 Lb.
92M	Spark Resistant Drum Lifter for rimmed 18" to 26" diameter	31 Lb.
92-SS	Stainless Steel Drum Lifter for rimmed 18" to 26" diameter	25 Lb.
92-30	Drum Lifter for rimmed 15" to 23" diameter	25 Lb.
92-5	Drum Lifter for rimmed 5-gallon pail 11" to 15" diameter	23 Lb.

**Lifter for Drum and Overpack**

Model 91 has simple tong design with broad grippers, providing fast overpacking. Its narrow profile allows complete lowering into an overpack drum.

Handle: 55-gallon steel drum into overpack or 85-gallon steel overpack.

Capacity: 1000 Lb.

Ship weight: 19 Lb.



**Heavy-Duty Drum Lifters**

Lift and move your heaviest drum with this below-hook lifter. Upend or downend a drum using off-vertical mode.

Models 42 and 42-G have alloy chain, links and lifting rings with heavy-duty steel rod and welded eyes. Forged steel hooks engage drum rims. Model 42-G has hot dipped galvanized finish.

Handle: 55 or 85-gallon steel drum.

Capacity: 2000 Lb.

Ship weight: 9 Lb.



**Fork Mount Hook Model 284**

Model 284 allows you to use your forklift like a hoist. Slide this hook onto one fork of your truck and tighten the T-screw to use a below-hook drum lifter. Fork opening is 5.5" x 1.56"

Capacity: 2000 Lb. Ship weight: 11 Lb.



**Verti-Karriers**

Grab, lift, move and place your drum.

Verti-Karriers grip the drum automatically, then release it only when the drum is set down. This saves time for your operators and discourages dangerous climbing.

Handle: Rimmed 55-gallon steel drum.

Capacity: 1000 Lb.



Model #	Description	Ship Weight
90	Verti-Karrier for 55-gallon steel drum	46 Lb.
90M	Spark Resistant Verti-Karrier for 55-gallon steel drum	47 Lb.
90-SS	Stainless Steel Verti-Karrier for 55-gallon steel drum	46 Lb.
90-30	Verti-Karrier for 30-gallon steel drum	45 Lb.
90-85	Verti-Karrier for 85-gallon steel salvage drum	59 Lb.

**Drum Lifter Models 86 & 86-SS**

Use to lift and transport an upright drum with your hoist or crane. Holds securely around your drum and has bottom support bar.

Handle: Steel, plastic or fiber drum 22" to 23.5" in diameter, and 23" to 38" high.

Model 86 is carbon steel painted blue. Model 86-SS is type 304 stainless steel.

Capacity: 1000 Lb.

Ship weight: 61 Lb.




**Drum Lifting Hook**

Use model 41 drum lifter with your hoist, crane or fork mounted hook to lift and move a heavy drum. Has an alloy steel lifting ring, steel rods and malleable iron hooks.

Handle: 55-gallon steel drum 34" to 36" long.

Capacity: 1000 Lb.

Ship weight: 5 Lb.




**Spark-Resistant Drum Lifting Hook**

Model 41M is like model 41, but lifting ring and hooks are spark resistant aluminum/bronze alloy, and rods are stainless steel.

Handle: 55-gallon steel drum 34" to 36" long.

Capacity: 1000 Lb. Ship weight: 7 Lb.



# HYDRA-LIFT KARRIERS

## Hydra-Lift Karriers

Lift an 800 Lb. drum and pour up to 96" high




**Model 400A-96-110**  
Capacity: 800 Lb.  
Pour height: 96"  
Power Option # 110  
electric power lift and tilt



**Model 400A-72**  
Capacity: 800 Lb.  
Pour height: 72"  
Hand pump drum lift  
Chain wheel drum tilt  
Shown with  
MORcinch™  
Bracket Assembly  
Option # 4556-P  
(sold separately)

### Dimensions

(refer to chart at right)

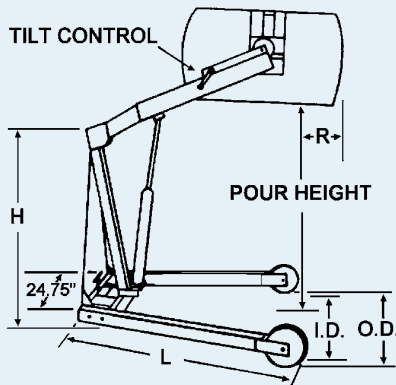

**Power Options** make drum handling easier and faster. Enjoy the ergonomic advantage of powered lift and tilt with electric, 12V battery or air power options. To order a complete unit with a power option, use the Power Option # from the chart at right as a suffix on the Model number.

Example: Model 400A-96-110 (shown at top) is the Hydra-Lift Karrier with 96" lift and Power Option # 110 - Electric Power Lift and Tilt.

We recommend the MORStop Tilt-Brake Option factory installed on each new manual tilt Hydra-Lift Karrier. It automatically holds the drum tilt angle, even when drum contents shift.

You may handle a drum with a faucet, valve or drum cone (page 13) attached to control dispensing.

Stainless steel models and models with spark resistant parts are available.



Install **MORStop Tilt-Brake** option to automatically prevent unwanted drum tilting.

- **Mode s to lift, move and pour a drum up to 8' high**
- **Power lift and tilt options**
- **Rotate drum 360° in either direction**
- **MORcinch™ Drum Handling System (page 3) accepts options for handling a plastic drum, a fiber drum, or various sizes of smaller drums**

One person can safely and easily handle a heavy drum with a Morse Hydra-Lift Karrier. Adjust the drum tilt angle for controlled dispensing of the contents from your drum. Order your Hydra-Lift Karrier with optional AC, DC or Air power lift and tilt.

The MORcinch™ Drum Holder automatically adjusts for 22" to 23.5" diameter drum, and accepts options (page 3) for plastic or fiber drum, and Diameter Adaptors for smaller drums.

## Heavy-Duty Hydra-Lift Karriers

Lift a 1200 Lb. drum and pour up to 72" high



Heavy-Duty Hydra-Lift Karriers feature a twin boom overhead assembly with two lift cylinders. The lower frame has parallel legs and steel wheels. They include the MORcinch™ Drum Holder.

**Model 410-110**  
Capacity: 1200 Lb.  
Pour height: 72"  
Power Option # 110  
electric power lift and tilt.

### Hydra-Lift Karriers with Manual Lift and Tilt

Model #	Capacity	Pour Height	R	H	L	O.D.	I.D.	Tilt Control	Ship Wt.
410	1200 Lb.	72"	1"	53"	60"	36"	27"	Chain Wheel	535 Lb.
400A-60	800 Lb.	60"	12"	55"	60"	44"	37"	Hand Crank	319 Lb.
400A-72	800 Lb.	72"	6"	55"	60"	44"	37"	Chain Wheel	322 Lb.
400A-96	800 Lb.	96"	- 4"	69"	72.5"	49"	42"	Chain Wheel	379 Lb.

Manual lift and tilt models have hydraulic hand pump drum lift, and manual drum tilt control.

### Power Options

Power Option #	Description	Motor Type	Motor Control	Ship Wt. Adder
110	AC Power Lift and Tilt	1HP/115V/60Hz AC	Switch, Cord and Plug	75 Lb.
114	Air Power Lift and Tilt	Air, Vane Type	On/Off Air Valve *	95 Lb.
115	Battery Power Lift and Tilt	12V DC with charger	Built-in	120 Lb.
120	AC Power Lift, Manual Tilt	1HP/115V/60Hz AC	Switch, Cord and Plug	40 Lb.
124	Air Power Lift, Manual Tilt	Air, Vane Type	On/Off Air Valve *	25 Lb.
125	Battery Power Lift, Manual Tilt	12V DC with charger	Built-in	85 Lb.

\* Requires FRL = Filter, Regulator, and Lubricator (order Morse option # 3869i-P).

### Manual Tilt Control Options

Option #	Description
X01	Hand Crank and MORStop Tilt-Brake
X02	Hand Crank
X03	16" Diameter Hand Wheel
3900i-P	MORStop Tilt-Brake Factory installed on new unit
3900-P	MORStop Tilt-Brake for field installation on existing unit

- Lift, move, weigh and pour a drum up to 106" high
- Easy to maneuver with tight turning radius
- Compact base provides small foot print
- Lifts drum straight up
- Rotate drum 360° in either direction
- Features MORcinch™ Drum Handling System (page 3)
- Power lift and tilt options (page 12)
- Scale-equipped units available

## Vertical-Lift Drum Pourers

# VERTICAL-LIFT DRUM POURERS

### Diameter Adaptors

Add the correct Diameter Adaptor for each smaller drum to handle multiple drum sizes with same drum handler. Simply and quickly place into and remove from the drum holder. Adaptors for 17.5" diameter and smaller have adjustable hold-down brackets for up to 38" tall drum.

Stainless steel and spark resistant adaptors are also available.



Model 55/30-19



Model 55/30-16

Vertical-Lift Drum Pourers allow you to control the lift height and pouring angle of your drum weighing up to 800 Lb. Rotate a drum 360° in either direction, and pour at up to 106" high. Power lift and tilt provide easy, ergonomic drum handling.

The MORcinch™ Drum Holder automatically adjusts for 22" to 23.5" diameter drum, accepts options for plastic or fiber drum, accepts various Diameter Adaptors for smaller drums, has a flexible chain cover to help protect the sidewall of your drum, and includes safety covered gears.

Models with spark resistant parts are available. Stainless steel models are also available on a custom basis.

### Scale-Equipped Vertical-Lift Drum Pourers

allow you to weigh as you pour! Eliminate the need to move a drum to a separate scale. Dispense exactly how much you need as you view drum weight on built in scale indicator.



Model 515-T-114

has 60" pour height, is scale-equipped with intrinsically safe indicator, and has air power lift and tilt.



Model 520-110 has 106" pour height and AC power lift and tilt.

### Example Vertical-Lift Drum Pourers

Model #	Pour Height	Scale Type	Power Option (see page 12)	Ship Wt.
515-T-114	60"	T	114	835 Lb.
525-N-124	106"	N	124	921 Lb.
510-115	60"	No Scale	115	695 Lb.
520-125	106"	No Scale	125	858 Lb.

### Drum Cones

Replace your drum lid with a Cone and Clamp Collar to reduce dust while dispensing dry material. Start and stop dispensing through the 6" opening with a slide gate or iris valve. Each cone is sized for a specific drum diameter of steel or fiber drum from 15.5" up to 23.5". They are available with 45° or 60° angle, and made of regular or stainless steel.



Model 5-IV-45-23 Drum Cone with Iris Valve, and Clamp Collar 7-23.



Stainless Steel Drum Cone model 5SS-SG-45-23 with Slide Gate, and Clamp Collar model 7SS-23.



### Example Drum Cones and Clamp Collars

Model #	Description	Ship Wt.
5-SG-45-23	Drum Cone with Slide Gate, 45 degree angle, Size # 23	35 Lb.
5-IV-60-23	Drum Cone with Iris Valve, 60 degree angle, Size # 23	35 Lb.
5SS-SG-45-23	Stainless Steel Drum Cone with Slide Gate, 45 degree angle, Size # 23	35 Lb.
5SS-IV-60-23	Stainless Steel Drum Cone with Iris Valve, 60 degree angle, Size # 23	35 Lb.
7-23	Clamp Collar, Size # 23	15 Lb.
7SS-23	Stainless Steel Clamp Collar, Size # 23	15 Lb.


### Two Scale Types Available



"T" Type Intrinsic safe scale indicator for use in hazardous areas.



"N" Type scale indicator NOT for use in hazardous environments.

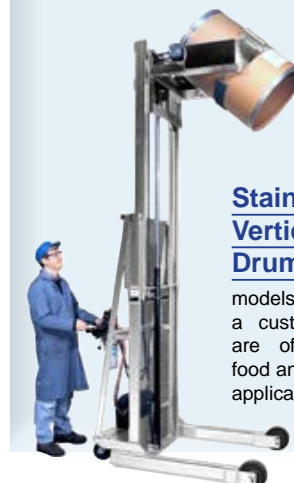

### Stainless Steel Vertical-Lift Drum Pourers

models are available on a custom basis. They are often required in food and pharmaceutical applications.

**4-Wheel Drum Trucks**

**Move and dispense your drum with ease  
Move drum on and off pallets**

**Capacity: 1,000 Lb.**

Morse 4-Wheel Drum Trucks make it easy to move a heavy drum. They are simple to load, maneuver and carry the full weight of a drum on four 8" polyolefin wheels. There is no need to support or balance the truck. You can move a drum on and off pallets and even stand alone in horizontal position to dispense. It's U-shaped handle is more narrow than a 55-gallon drum. When you're done using the truck, it stands upright for storage.

Handle 30, 55 or 85 gallon steel drum, 14" to 28" diameter and 30" to 41" tall. Includes most rimmed plastic or fiber drums.

Option # 5058-P Strap Kit enables you to pull a rimless plastic drum onto drum truck.



Model 160



Option 5058-P



Model 160-SS



Model 160-WP

Model #	Description	Ship Wt.
160	4-Wheel Drum Truck	65 Lb.
160-SS	4-Wheel Drum Truck, T304 Stainless Steel	63 Lb.
160-WP	4-Wheel Drum Truck, 10" pneumatic wheels	85 Lb.
160-WP-SS	4-Wheel Drum Truck, 10" pneumatic wheels, T304SS	85 Lb.
160M	4-Wheel Drum Truck with spark resistant parts	63 Lb.
5058-P	Option: Strap Kit for rimless drum	2 Lb.

**2 & 3 Wheel Drum Trucks**

**Models 152 and 153 Drum Trucks**

Easy to use, inexpensive drum trucks Trim, all steel welded construction. Handle 30, 55 or 85 gallon drum. Model 152 has 10" rubber wheels. Model 153 has 10" polyolefin wheels. Capacity: 1,000 Lb.



**Model 155 Handstand Drum truck**

Stands upright for convenient, space saving storage. Has a support to stand the drum truck upright. This doubles as a footrest to assist you in loading your drum. Handle 30, 55 or 85 gallon drum. Capacity: 1,000 Lb.



**Model 125 "No Spill" Drum Truck**

Transport your drum in upright position. Provides excellent stable control of upright drum with a handle attached to the base, two 8" polyolefin wheels, and a 4" swivel caster. Handle 55-gallon steel, plastic or fiber drum up to 24" in diameter. Capacity: 1,200 Lb.



Model #	Description	Ship Wt.
125	"No Spill" Drum Truck	45 Lb.
152	2-Wheel Drum Truck, 10" rubber wheels	42 Lb.
153	2-Wheel Drum Truck, 10" polyolefin wheels	40 Lb.
155	2-Wheel Handstand Drum Truck, 10" polyolefin wheels	46 Lb.

**Drum Cradle Trucks**

**Model 36 Cradle Truck** Easy to load 55-gallon drum cradle with built-in retractable tipping lever. Capacity: 500 Lb. Ship weight: 30 Lb.



**Model 40 Cradle Truck** designed with rugged angle iron construction. Capacity: 700 Lb. Ship weight: 32 Lb.

Use with Model 31 Tipping Lever to assist in loading a heavy drum onto Cradle Truck. Tipping Lever is 40" steel tubing with rim hook.



Model 40 Cradle Truck and Model 31 Tipping Lever

**Model 40-30** is like Model 40, but sized for your 30-gallon drum. Ship weight: 31 Lb.

**Model 46 Cradle Truck** Handle a 15-gallon steel drum. Rock-over loading. Has four 3" polyolefin wheels. Capacity: 500 Lb. Ship weight: 20 Lb.



**Drum Upender**

Model 32 provides leverage for uprighting a horizontal steel drum. Ship weight: 11 Lb.



Model 46

**Drum and Pail Heaters**

Easy to use, flexible drum heaters provide a simple, effective and reliable way to heat the contents of your drums. There is a Morse Drum Heater for your 5-gallon pail, and 30-gallon or 55-gallon drum, whether plastic, steel or fiber. Positioned below the content level of the drum, your Morse drum heater will conform to the curvature of the drum to conduct heat through the drum wall to the product inside. Adjust the thermostat to automatically maintain the correct temperature. Two or more drum heaters may be used on the same drum for faster warming.



- Heaters for metal drum: 50° to 425° F (10° to 218° C) thermostat
- Plastic or fiber drum heaters: 50° to 160° F (10° to 71° C) thermostat

Use your drum heater to melt, preheat, prevent freezing, control viscosity, or promote flow and dissolution. They are equipped with cord. 115V heaters also include a plug. Not for use with flammables or in explosion hazard areas.

Drum Heater ship weight: 3 Lb. Pail Heater ship weight: 2 Lb.

Model #	Heater Description	Fits Diameter
710-55-115	55-Gallon steel drum, 115V 1500W, 4" wide band	22 5" +/- 1"
710-55-230	55-Gallon steel drum, 230V 1500W, 4" wide band	22 5" +/- 1"
710-30-115	30-Gallon steel drum, 115V 1000W, 4" wide band	18.25" +/- 1"
710-30-230	30-Gallon steel drum, 230V 1000W, 4" wide band	18.25" +/- 1"
710-5-115	5-Gallon metal pail, 115V 550W, 4" wide band	11 25" +/- 1"
710-5-230	5-Gallon metal pail, 230V 550W, 4" wide band	11 25" +/- 1"
711-55-115	55-Gallon plastic or fiber drum, 115V 300W, 4" wide band	22 5" +/- 1"
711-55-230	55-Gallon plastic or fiber drum, 230V 300W, 4" wide band	22 5" +/- 1"
711-5-115	5-Gallon plastic pail, 115V 150W, 4" wide band	11 25" +/- 1"
711-5-230	5-Gallon plastic pail, 230V 150W, 4" wide band	11 25" +/- 1"

# PailPRO Series™ 5-Gallon Pail Handlers

Ergonomic, safety conscious pail handling equipment

- Increase productivity
- Help prevent repetitive motion injuries

## PailPRO™ 5-Gallon Can Tumblers Mix right inside your closed cans



**Single Can Tumblers**  
rotate one can.



**Double Can Tumblers**  
tumble one or two cans at a time.

Thorough "corner-over-corner" mixing action. Blend or agitate dry or liquid loads. Tumble parts with media to deburr or polish. Rotation speed is 23 RPM continuous in one direction. It does not shake or oscillate.

Rotate pail or can 4.5" to 16.5" tall and up to 12.5" in diameter.

Single phase/115V models have timer for 0 to 60 minutes. AC Motor is 1/4 HP, 60 Hz. Models with explosion-proof motor or air motor available for hazardous areas.

Base dimensions: 28" x 28".

Capacity: 100 Lb. per can.

Note: OSHA requires ALL rotators to have enclosure interlocked with drive mechanism, so it cannot revolve unless guard is in place. One way to accomplish this is with a Morse enclosure with safety interlock.



Guard Enclosure GEK-2-305-1  
(Can Tumbler sold separately)

### Example Can Tumblers and Enclosure Kits

Model #	Description	Ship Wt.
1-305-1	Single Can Tumbler with timer, 1-phase 115V TEFC	215 Lb.
GEK-1-305-1	Guard Enclosure Kit with Safety Interlock for Model 1-305-1 (Can Tumbler sold separately)	125 Lb.
2-305-1	Double Can Tumbler with timer, 1-phase 115V TEFC	245 Lb.
GEK-2-305-1	Guard Enclosure Kit with Safety Interlock for Model 2-305-1 (Can Tumbler sold separately)	250 Lb.

## PailPRO™ Below-Hook Can Tipper

Ergonomic model 85-5 pail handler to lift and pour your 5-gallon plastic or metal pail, 11" to 12" in diameter.

Capacity: 200 Lb.



## PailPRO™ Below-Hook Pail Lifter

Model 92-5 is sized for your 5-gallon pail with 11" to 15" diameter.

Capacity: 1,000 Lb.



## PailPRO™ 5-Gallon Pail Dollies



Place your pail weighing up to 200 Lb. onto a dolly to move it around on four 3" swivel casters. Helps employees safely move pails around and reduce repetitive lifting. Pail dollies have a flat deck design with four rounded corners turned up to hold a pail in position. Ship weight: 10 Lb.

Model 34-5 is steel construction painted blue.

Model 34-5SS is type 304 stainless steel suitable for food and pharmaceutical applications. The swivel casters have nickel plated metal components.

Option # 4959i-P: Stainless steel casters with polypropylene wheels.

## Model 83 PailPRO™ 5-Gallon Pail Handler

- Lift, tilt and pour a 5-gallon pail with ease
- Dispense at up to 5 feet high

Use Morse model 83 to lift and pour a 5-gallon pail weighing up to 150 Lb. It is easy to maneuver, and compact enough to move through standard doorways. The hand wheel used to turn the pail is equipped with the MORStop Tilt-Brake which automatically locks the tilt position until you move it again. Use the parking brake to prevent the unit from moving while you pour. Moving parts of this safety oriented design are enclosed to avoid pinch points.

Handle 11" to 12" diameter pail.

Base Dimensions: L33" x W32". Overall height: 80". Ship weight: 180 Lb.

Optional Counter Weight Kit part # 3930-P (not shown) allows the base to be reversed to enable pouring beyond the front wheels. The capacity with this option installed is reduced to 75 Lb.



## PailPRO™ 5-Gallon Pail Heaters

Heat your metal or plastic 5-gallon pail. The flexible heater band conforms to the curvature of the pail to heat the contents. Fits 11.25" +/- 1" diameter pail.



Model #	Heater Description	Thermostat
710-5-115	5-Gallon metal pail, 115V 550W, 4" wide band	50° to 425° F
710-5-230	5-Gallon metal pail, 230V 550W, 4" wide band	50° to 425° F
711-5-115	5-Gallon plastic pail, 115V 150W, 4" wide band	50° to 160° F
711-5-230	5-Gallon plastic pail, 230V 150W, 4" wide band	50° to 160° F

## Model 152-5 PailPRO™ 5-Gallon Pail Truck

Ergonomic 2-wheel truck eases handling a heavy 5-gallon pail or can. Simply place the pail handle over the hook and pull back on the truck handle to lift the pail. It rolls easily on two 8" diameter MORTUF hard polyolefin wheels. When you're done, the pail truck stands upright by itself.

Capacity: 150 Lb. Shipping weight: 27 Lb.



## PailPRO™ Can Tipplers ideal for dispensing 5-gallon pails

These can tipplers are ideal for dispensing small quantities from a 5-gallon can or pail. A safety lock holds pail in place. Dispensing height is 10". Fold for storage. Capacity: 75 Lb. per can.

Model 15 handles a single pail. Model 2-15 handles two pails. Model 15-SS is made of type 304 Stainless Steel and handles a single pail.



Model 15-SS



Model 2-15



The Specialist In Drum Handling Equipment

**Morse Manufacturing Company, Inc.**  
 727 West Manlius Street  
 East Syracuse, NY 13057-0518

### Drum Hand Pumps

#### Drum Pumps to dispense liquids from your drum

The self priming piston pumps on the forward and back strokes (double action) to yield a gallon in fewer than five cycles. Use for liquids at temperatures up to 80° F and maximum viscosity of 2,000 SSU (e.g. 30W motor oil). Each pump model is designed to be compatible with specific chemicals. Check Morse website for chemical compatibility of each liquid by chemical name. It is the user's responsibility to take appropriate safety and protective measures with hazardous chemicals. Specifications are subject to change without notice.

**Models 26, 27-1AE and 27-4AV** are generally for liquids in pH 4 to 9 acidity/alkalinity range.

**Models 28-5BV and 28-6BE** are for a wider pH range.



Model #	Body Material	O-Ring	Gasket	Discharge Hose	Suction Tube	Compatible Liquids (General Guide)	Ship Weight
26	Polyester	Viton	Cork-Nitrile	PVC	Polyester	Petroleum products, lube oils	10 Lb.
27-1AE	Polyester	EPDM	EPDM	EPDM	Polyester	Methyl alcohol, ethyl alcohol	10 Lb.
27-4AV	Polyester	Viton	Viton	Cross linked polyethylene	Polyester	Some naphthas, some aromatics	12 Lb.
28-5BV	Ryton	Viton	Viton	Cross linked polyethylene	Teflon	Some chlorinated solvents, acids, aromatics, xylene	12 Lb.
28-6BE	Ryton	EPDM	EPDM	EPDM	Teflon	Some acids, caustics, ketones, acetates	11 Lb.

### Drum Faucets

**Model 65-20 Molasses Gate Faucet** for viscous liquids is made of grey iron with a brass sliding plate closure. Sized for 2" pipe thread.

**Model 65-75** is like model 65-20, but sized for 3/4" bung of metal drum.



Model 65-20

**Model 68-20 Polyethylene Faucet** Ideal for use with nonflammable, corrosive liquids. Has a fast half-turn on/off handle that stays open until you close it. Use to control dispensing of viscous liquids through the 2" bung of your metal drum.

**Model 68-75** is like model 68-20 above, but sized for 3/4" bung thread. Use for more fluid liquids.



Models 68-20 and 68-75

Model #	Description	Ship Weight
65-20	Molasses Gate Faucet for 2" pipe thread	3 5 Lb.
65-75	Molasses Gate Faucet for 3/4" pipe thread	1 5 Lb.
68-20	2" Polyethylene Faucet	1 Lb.
68-75	3/4" Polyethylene Faucet	.1 Lb.

### MORplug™ Drum Wrenches

#### Fit virtually any steel, plastic or fiber drum

MORplug™ drum wrenches have numerous surfaces and shapes to fit virtually all drum plugs on your steel, plastic or fiber drums. The generous size provides extra leverage and hand clearance.

**Model 59** is for use with drums of nonflammable materials.

**Model 59SRZ** is an economical wrench made of spark resistant, high-strength zinc aluminum alloy.

**Model 59SRM** is made of spark resistant manganese bronze... a precaution when handling drums of flammable material. It has high ultimate strength and extra elasticity.



# BENKO PRODUCTS

ENGINEERED TO BE MORE

5350 Evergreen Parkway, Sheffield Village, OH 44054

ph: 440-934-2180 fax: 440-934-4052

www.benkoproducts.com ---- info@benkoproducts.com