

# **Specifications**

The Hot Box has many unique features:

- Rugged steel construction
- Portable; just pick-up with a forklift
- Built-in spill containment
- Zero-ground clearance available
- 2-year Manufacturer's warranty

## **Capacity**

24 drums (55 gal.) or 6 totes 24,000 lbs. total capacity

### **Materials of Construction**

All steel construction includes:

- 12 gauge interior walls and 14 gauge exterior walls
- Integrated framing and structural members ensure toughness
- 304 stainless steel construction available

### **Dimensions**

Interior dimensions: 172.25"W x 55.25"D x 97.5"H Exterior dimensions: 179.25"W x 62"D x 118"H

### Insulation

3" thick, 6# density mineral wool

### **Heating Medium**

Steam, hot oil, or hot water

## **Heat Exchanger**

Finned tube heating coil rated for saturated steam up to 200 psig. Recirculating coil available for hot oil or hot water.

## **Temperature Range**

Room temperature to 350°F

### **Spill Containment Pan**

160 gallon capacity

#### **Finish**

- Exterior finished with acrylic enamel
- Interior finished with heat resistant silver
- Stainless steel available





# **Steam Hot Box**

Model S24

The Benko Products SAHARA HOT BOX drum heaters and ovens are recognized as the industry leader in 55-gallon drum heating equipment. Steam drum heaters are available with state-of-the-art digital controls with independent overtemperature protection. Units in a manifolded arrangement can be individually turned off when not heating, perfect for your drum storage and drum heater needs.

## **Unit Weight**

7,275 lbs.

### Installation

Shipped completely assembled.
Set in place and hook up power supply.

## **Engineering**

Custom engineered, computer designed units are available. Contact us for more information.

\* Class A ovens available for heating flammables.








# **Steam Hot Box**

Model S24

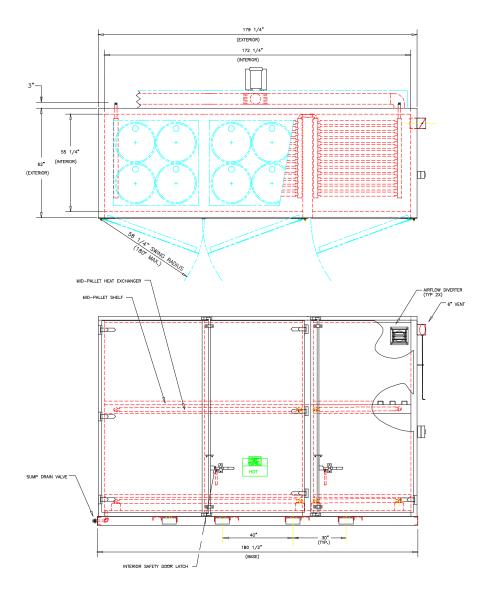

#### NOTES:

- 1. UNIT WEIGHT: 7275 Lbs. (AS SHOWN)
- 2. FINISH:
  EXTERIOR: ACRYLIC ENAMEL
  INTERIOR: ALUMINUM—BASED ENAMEL
- 3. HEATING MEDIUM: HOT WATER HEAT EXCHANGERS (2) 1° SCHED. 40 FINNED TUBE PIPE WITH 2° SCHED. 40 HEADERS 200 PSIG MAX. PRESSURE
- 4. SPILL CONTAINMENT: 160 GALLONS
- 5. MATERIALS:
  EXTERIOR: HRS, 14 GA. (.075")
  INTERIOR: HRS, 12 GA. (.105")
  FORMED CHANNEL GRATING

INSULATION: 3" X 6# DENSITY MINERAL WOOL (ALL WALLS, FLOOR, CEILING AND DOORS)

#### OPTIONS

SELF-ACTING TEMPERATURE CONTROL
STEAM TRAP
VENT W/DAMPER
INTERIOR DOOR LATCH RELEASE
SPILL PAN DRAIN VALVE
CUSTOM FINISHES
OUTDOOR PACKAGE
ADDITIONAL HEAT EXCHANGERS
ADDITIONAL HEAT EXCHANGERS
AIR RECIRCULATION BLOWER
ELECTRONIC CONTROL PACKAGE
FIVE YEAR WARRANTY

